

58"-72" DSP GOOSENECK PEDESTALS




PRO Features:

- 1) Universal face plate, 4" x 4" x .120" (11 gauge)
- 2) Universal base plate, 8" x 8" x .25" (1/4" plate)
- 3) Cover plate, 8.25" x 8.25" x 2.25" (16 gauge)
- 4) Heavy duty square tube 2" x 2" x .120" wall (11 gauge)
- 5) Mandrel system bend radius 6" on center (no neck collapse)
- 6) Phosphate pretreatment (rust inhibitor)
- 7) TGIC outdoor polyester powder coat with UV protectant
- 8) Includes carriage bolts (4) and nuts (4)
- 9) Boxed individually
- 10) Customizable dimensions and colors available upon request

Models

Model #	Height	Reach	Color Code	Weight	Box Size
58-9C-DSP-(add color code)	58" & 42"	12"	-BLK = Black Wrinkle -WHI = White -YEL = Yellow	40 lbs.	62x15x10
64-9C-DSP-(add color code)	64" & 42"	12"	-BLK = Black Wrinkle -WHI = White -YEL = Yellow	40 lbs.	68x15x10
72-9C-DSP-(add color code)	72" & 42"	12"	-BLK = Black Wrinkle -WHI = White -YEL = Yellow	40 lbs.	76x15x10



Description:

A sturdy, cost effective, pad mount pedestal meant to hold card readers, intercoms, keypads, telephone entry systems and housings. With a Dual-height Single Post (DSP) design, each unit offers both car/pedestrian and SUV/bus/truck height.

Made from heavy duty steel it will withstand most abuse from pedestrians and Mother Nature. It passed our facewind testing protocol which determined it can survive sustained Category 5 hurricane winds of 157mph. Competing products are made from weaker .074" thin (14-gauge) tube.

a state-of-the-art mandrel bending/die system in which the neck is formed uniformly, without collapsing the inside of the neck. Some competing products are bent to larger radius and therefore don't look as professional. Unlike other competing products, this gooseneck contains a sliding cover plate to hide the nuts and bolts used to mount the pedestal to concrete.

Each unit is washed first in a phosphate solution to prevent rusting, heat dried, coated with a TGIC outdoor polyester powder coat finish with UV protectant, and then baked at 400°F for the most extreme weatherability.

Pedestal PRO goosenecks are bent into the tightest 6" center radius using

Pedestal PRO leads the industry in quality.

Related Items

Housing



Model # MC-CS-8-E

Housing



Model # Lando-CS-12x8-E

Stud Anchor Kit



Stud Anchor Kit

L-Bolt Kit







L-Bolt Kit

Also Available:

Stainless Steel, Aluminum, and Polycarbonate Solutions

1-800-660-3072
 info@PedestalPRO.com
 947 W 500 N, Ste 101
 Lindon UT 84042
 www.PedestalPRO.com

58"-72" DSP GOOSENECK PEDESTALS

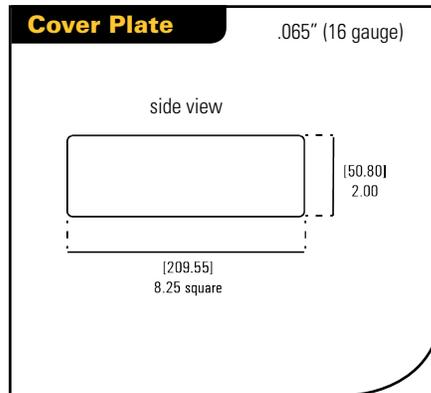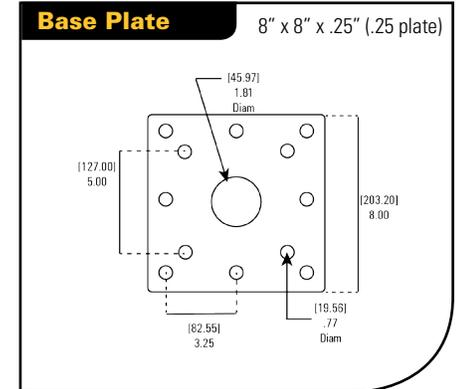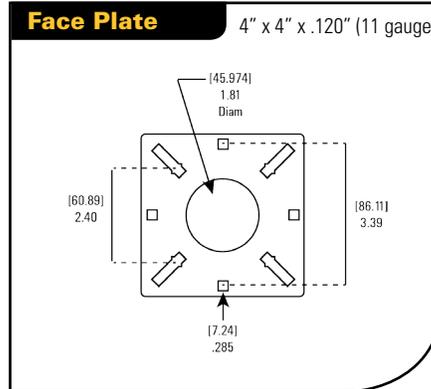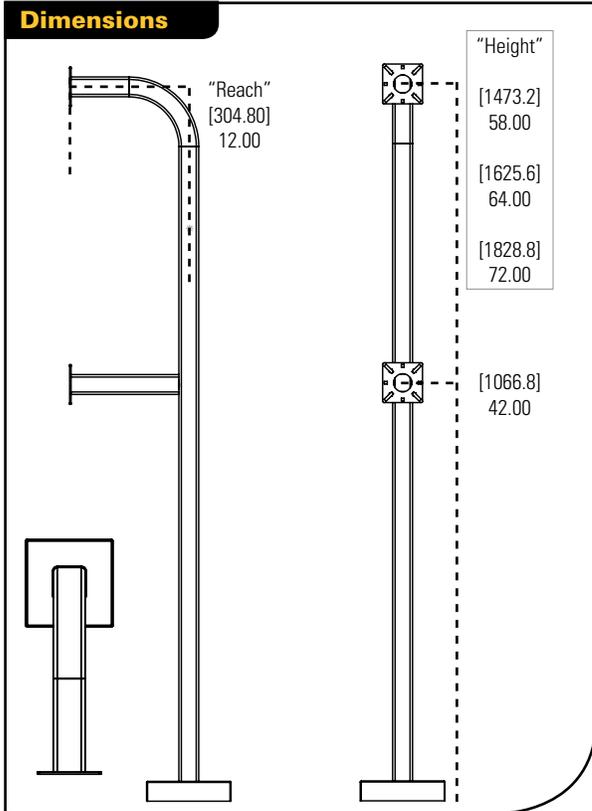

Customize

Stock Color

- Black

Readily Available Colors*

- White
- Safety Yellow

Custom "RAL" colors*

Adjust height, reach, face plate, and base plate specifications to meet your needs*
*additional costs and lead times may apply

Stress Test

Wind Speed: 200 mph (321 km/h)

Wind Force: 1.3333 psi

Face Area: 263.5959 in² (each square inch receives 1.3333 psi for a total of 351.34 psi)

Max Deflection or Displacement: The top corner displaces 0.8 (etc) mm

Max Stress: 6965.5 psi

Yield Strength: 89,984.6 psi (strength at which the material bends permanently)

Interpretation: The highest recorded sustained wind is 217 mph. At 200 mph, the top of the pedestal would move .8 mm without bending permanently. In the real world, the concrete or the mounting bolts and nuts would be fail first, not to mention the electronics would blow off even sooner.

